



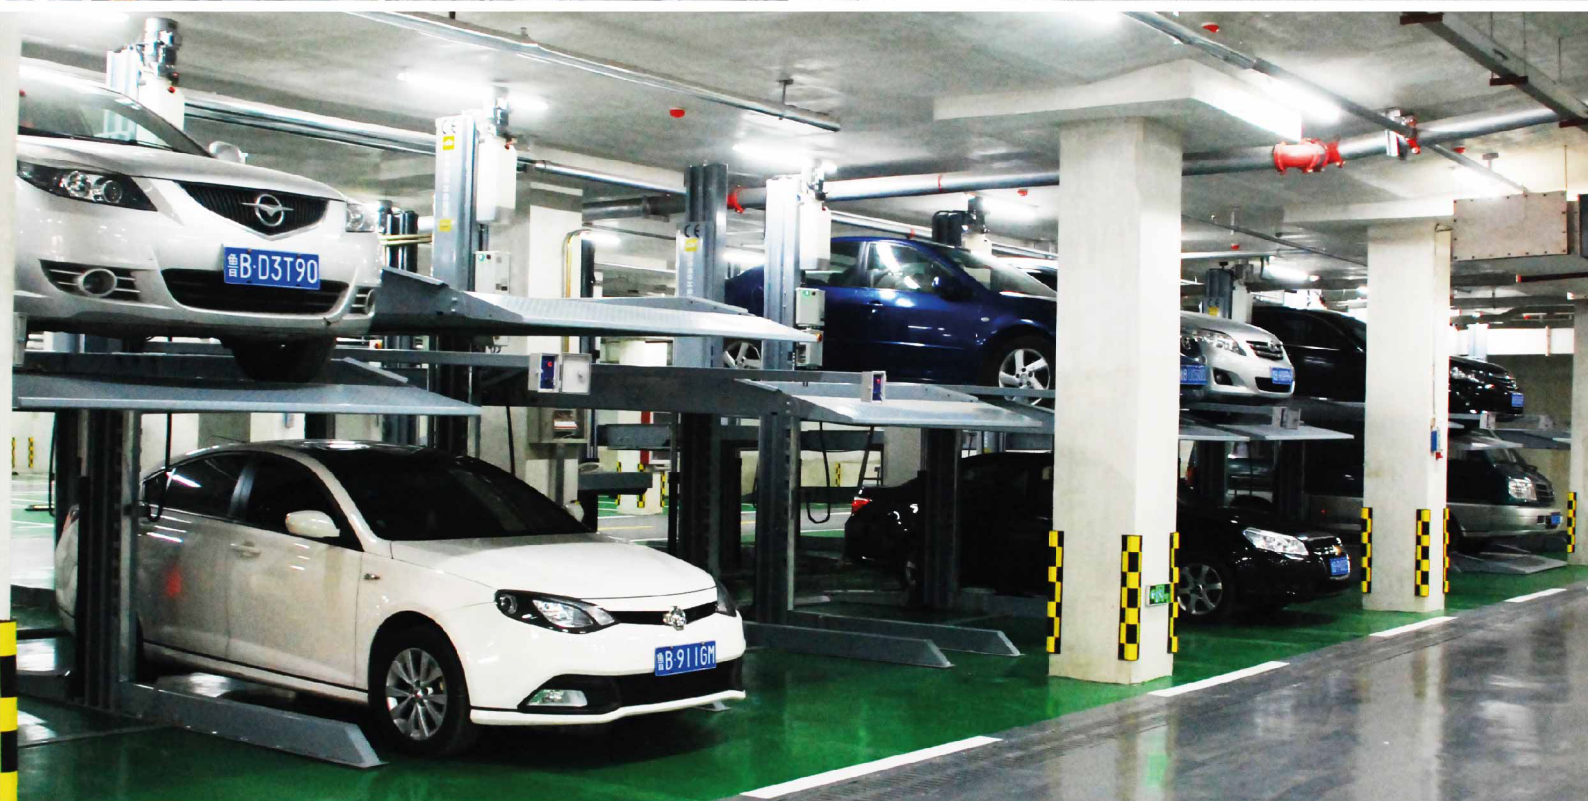

RISE PARKING LLP

CAR PARKING SYSTEM

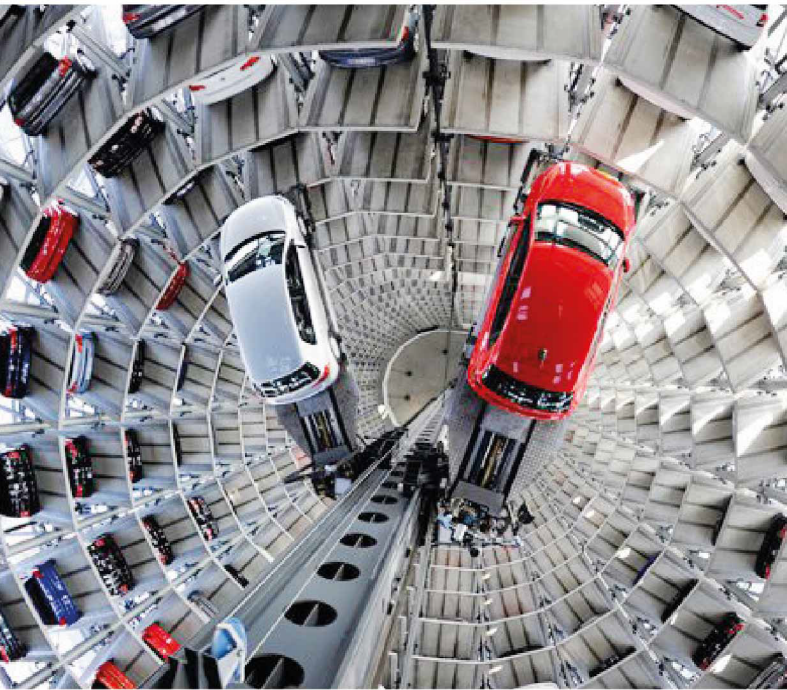

📍 239, Dheeraj Heritage, S.V. Road, Santacruz (W), Mumbai - 400054, INDIA


☎ +91-9987029222 📞 +91-22-67428023 ✉ parking@riseindustries.in 🌐 www.riseindustries.in



TWO LEVEL CANTILEVER PARKING

Specifications

Lifting Capacity	1800kg
Electrical Required	220-420V, 1 or 3Phase, 50/60Hz
Lock Device Release	Dynamic Manual
Operation	Button + Key Remote
Power Pack	Individual Power Pack
Motor Capacity	2.2 kW Hydraulic Power Pump
Lifting / Lowering Time	50/45 sec.
Metal Processing	Normal Bending Laser Cutting
Finishing	Double Paint Powder Coating

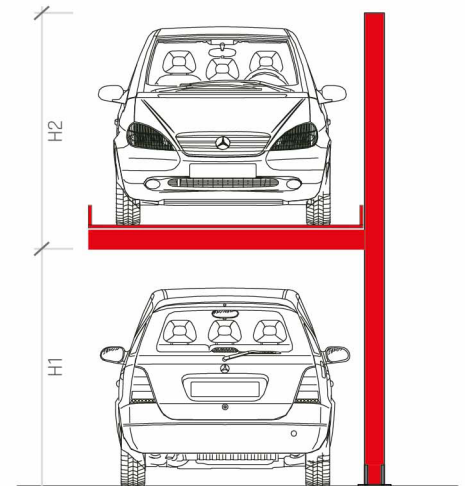


Models	Length (L)	Width (W)	Height (H)	H1	H2	Car Category
CSP S	4000	2300	3800	2000	1600	Small cars
CSP M	4000	2600	4000	2000	1800	Med sized Sedan



TWO LEVEL STACK PARKING

Specifications

Lifting Capacity	2000kg
Electrical Required	220-420V, 1 or 3Phase, 50/60Hz
Lock Device Release	Dynamic Manual
Operation	Button + Key Remote
Power Pack	Individual Power Pack
Motor Capacity	2.2 kW Hydraulic Power Pump
Lifting / Lowering Time	50/45 sec.
Metal Processing	Normal Bending Laser Cutting
Finishing	Double Paint Powder Coating

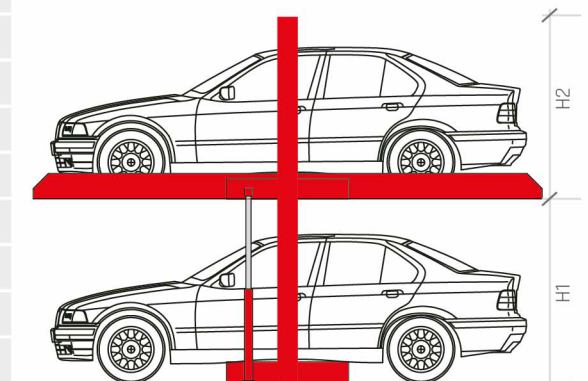


Models	Length (L)	Width (W)	Height (H)	H1	H2	Car Category
TPS S	4000	2300	3400	1700	1600	Small cars
TPS M	4000	2500	3600	1800	1700	Med sized Sedan
TPS B	4500	2700	4000	2000	1900	Large car/SUV's



THREE LEVEL STACK PARKING

Specifications

Lifting Capacity	2000kg per pallet
Electrical Required	220-420V, 1 or 3Phase, 50/60Hz
Lock Device Release	Dynamic Manual
Operation	Button + Key Remote
Power Pack	Individual Power Pack
Motor Capacity	2.2 kW Hydraulic Power Pump
Lifting / Lowering Time	50/45 sec.
Metal Processing	Normal Bending Laser Cutting
Finishing	Double Paint Powder Coating

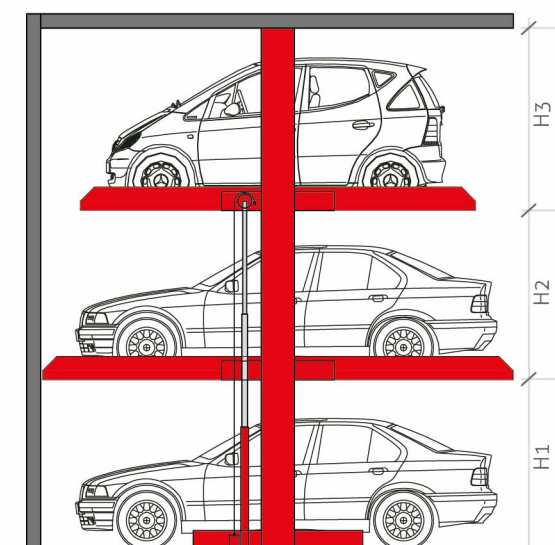


Models	Length (L)	Width (W)	Height (H)	H1	H2	H3	Car Category
TLSPS	4000	2300	5300	1700	1700	1700	Small cars
TLSPM	4800	2500	5600	1800	1800	1800	Med sized Sedan
TLSPB	5500	2600	6000	2000	1900	1900	Large Cars/SUV's



THREE LEVEL PIT PARKING

Specifications


Lifting Capacity	2000kg per pallet
Electrical Required	220-420V, 1 or 3Phase, 50/60Hz
Lock Device Release	Dynamic Manual
Operation	Button + Key Remote
Power Pack	Individual Power Pack
Motor Capacity	2.2 kW Hydraulic Power Pump
Lifting / Lowering Time	50/45 sec.
Metal Processing	Normal Bending Laser Cutting
Finishing	Double Paint Powder Coating

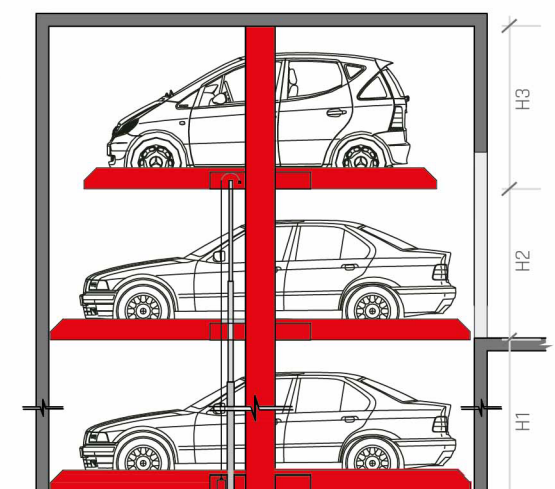

Models	System Length (L)	Available length inside	System Width (W)	Inside width	Height (H)	H1	H2	H3	Pit Depth	Car Category
TLPPS	4500	4300	2300	2100	5300	1700	1800	1700	1900	Small cars
TLPPM	5500	5300	2500	2300	5600	1800	1900	1800	2000	Med sized Sedan
TLPPB	5500	5300	2700	2500	6000	1900	2000	1900	2100	Large Cars/SUV's



PUZZLE PARKING SYSTEM

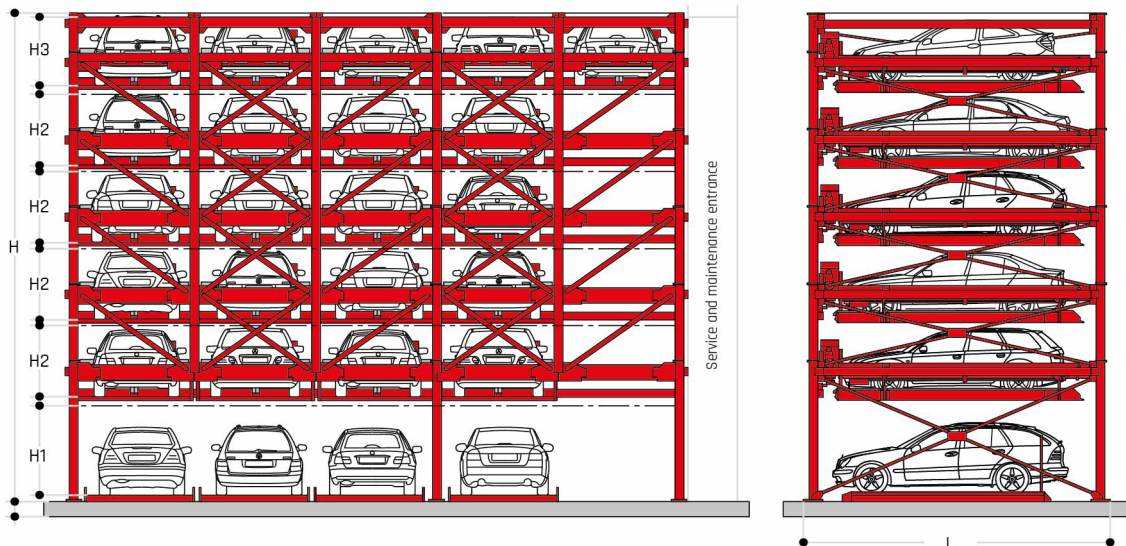

Models	Length (L)	Width (W)	Height (H)	H1	H2	H3
K	6200	2600	9000	2360	1680	1600
T	6400	2700	8650	2010	1680	1600
D	6200	2600	8650	2010	1680	1600
Z	6000	2500	8650	2010	1680	1600
X	5500	2400	8650	2010	1680	1600



TOWER PARKING

Specifications

Elevating speed:
70m/min

Sliding speed:
8m/min

Size of cars:
5000mm x 1850mm x 550mm

Weight of cars:
2000kgs

Max. collection time:
90s

Hoist or lower the drive way: roller
chain, steel wire rope

Control way:
PLC

Operational type:
turn keys, touch screen, IC card

